

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
24 December 2003 (24.12.2003)


PCT

(10) International Publication Number
WO 03/107483 A1

- (51) International Patent Classification⁷: H01Q 11/08, 1/36, 21/06
- (21) International Application Number: PCT/AU03/00690
- (22) International Filing Date: 3 June 2003 (03.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PS 2908 12 June 2002 (12.06.2002) AU
2003902112 30 April 2003 (30.04.2003) AU
- (71) Applicant (for all designated States except US): MA-
RINE-WATCH LTD [AU/AU]; 7 Grand Central Avenue,
Hallett Cove, S.A. 5158 (AU).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): CRAGGS, John,
Stanley [AU/AU]; 15 Jones Road, Kenthurst, NSW 2156
(AU). MEULMAN, Christopher, Boyce [AU/AU]; 40
Kedumba Crescent, North Turramurra, NSW 2074 (AU).
- (74) Agent: SPRUSON & FERGUSON; GPO Box 3898, Syd-
ney, New South Wales 2001 (AU).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: HELIX ANTENNA

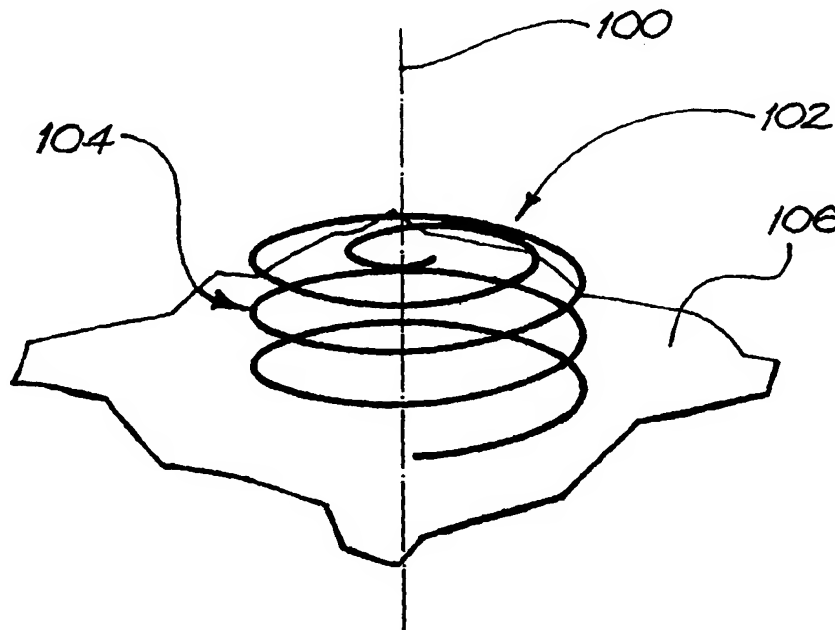

(57) Abstract: An antenna element is disclosed, having a ground plane (106), a helix (104) disposed above the ground plane (106), the helix (104) being connectable to a communications apparatus at a helix end (214) located near the ground plane (106), and a spiral (102) substantially centred on the axis (100) of the helix (104) the spiral (102) having an outer end thereof connected to the other helix end, said spiral (102) thereby terminating the antenna.



WO 03/107483 A1

WO 03/107483 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

HELIX ANTENNA

Field of the Invention

The present invention relates generally to antennas and, in particular, to helical antennas.

5

Background

In Mobile Satellite System (MSS) networks, antenna performance at the mobile terminal is critical in determining the performance of the overall system. Considerable development work has thus been performed globally relating to performance and implementation of antenna designs that are suitable for terminals in such networks.

10

Patch antennas were initially considered because of their low physical profiles, and their theoretical peak gains of greater than 7dB. In practical implementations, however, much lower peak gains were achieved. Furthermore, these antennas have narrow frequency bandwidth performance, and poor axial ratio performance at off-boresite angles, thus typically limiting their coverage to 25 degree elevation angles.

15

The aforementioned low antenna gain has been addressed by using phased array techniques which involve driving multiple antenna elements in parallel using a phased drive network. This enables higher overall antenna gain to be achieved while accepting lower gains from the individual antenna elements. High gain phased-array antenna arrangements using patches, with either manual or automatic antenna pointing, can typically provide between 9dB and 18dB of antenna gain. The phased array drive networks introduce undesirable losses into the antenna arrangements, however, and are complex to design across a broad range of operating frequency.

20

Low gain passive antennas using multifilar helices or patch elements have been used in MSS networks, typically exhibiting antenna gains up to 6dB.

Summary

An antenna concept disclosed herein provides a simple medium gain antenna, based on a low profile helix terminated with a spiral. The antenna offers significantly higher antenna gain than patch antenna arrangements.

5 According to a first aspect of the invention, there is provided an antenna element comprising:

 a ground plane:

 a helix disposed above the ground plane, the helix being connectable to a communications apparatus at a helix end located near the ground plane; and

10 a spiral substantially centred on the axis of the helix the spiral having an outer end thereof connected to the other helix end, said spiral thereby terminating the antenna.

 According to another aspect of the invention, there is provided an antenna comprising:

 a phased array feed network having an equipment feed-line for connection to
15 communication apparatus and a plurality of element feed-lines for connection to a like plurality of antenna elements, said phased array feed network being adapted to collectively connect said plurality of antenna elements to the communication apparatus; and

 said plurality of helix antenna elements arranged in a domino pattern, each said
20 helix antenna element comprising a ground plane, and a helix disposed above the ground plane, the helix being connectable to a communications apparatus at a helix end located near the ground plane, each said helix antenna element being individually connectable at a respective helix end located near the ground plane to a respective element feed-line of the phased array feed network to thereby connect to the communications apparatus.

25 According to another aspect of the invention, there is provided an antenna comprising:

a ground plane:

a plurality of helix elements disposed above the ground plane, each said helix being connectable, via a respective feed line of an associated phased array feed network to a communications apparatus, at a helix end located near the ground plane; and

5 a like plurality of spirals, each substantially centred on the axis of the corresponding one of the plurality of helix elements, said each spiral having an outer end thereof connected to the other helix end of the corresponding one of the plurality of helix elements, said spiral thereby terminating the corresponding helix element.

According to another aspect of the invention, there is provided an antenna
10 comprising:

a ground plane:

a plurality of helix elements disposed above the ground plane, each said helix being connectable, via a respective feed line of an associated switched element feed network to a communications apparatus, at a helix end located near the ground plane; and

15 a like plurality of spirals, each substantially centred on the axis of the corresponding one of the plurality of helix elements, said each spiral having an outer end thereof connected to the other helix end of the corresponding one of the plurality of helix elements, said spiral thereby terminating the corresponding helix element.

According to another aspect of the invention, there is provided an antenna
20 comprising:

a phased array feed network having an equipment feed-line for connection to communication apparatus and a plurality of element feed-lines for connection to a like plurality of antenna elements, said phased array feed network being adapted to collectively connect said plurality of antenna elements to the communication apparatus;

25 and

said plurality of helix antenna elements being disposed above said ground plane and arranged in a rectangular grid pattern having a first spacing between rows of said rectangular grid pattern and a second spacing between columns of said rectangular grid pattern, each said helix antenna element being individually connectable at a respective helix end located near the ground plane to a respective element feed-line of the phased array feed network to thereby connect to the communications apparatus.

According to another aspect of the invention, there is provided a method of impedance matching an antenna element wherein the antenna element comprises a ground plane, a helix disposed above the ground plane, the helix being connectable to a communications apparatus at a helix end located near the ground plane, and a spiral substantially centred on the axis of the helix the spiral having an outer end thereof connected to the other helix end, said spiral thereby terminating the antenna, said method comprising the steps of:

adjusting a distance, from the ground plane, of the helix end located near the ground plane to thereby adjust the impedance of a tapered transmission line formed between the ground plane and a first quarter turn of the helix.

Other aspects of the invention are also disclosed.

Brief Description of the Drawings

One or more embodiments of the present invention will now be described with reference to the drawings, in which:

Fig. 1 shows the disclosed helix antenna;

Fig. 2 shows side and plan views of the antenna;

Fig. 3 shows a typical azimuth radiation pattern for the antenna;

Fig. 4A shows a switched antenna arrangement using the antenna;

Fig 4B shows switch azimuth antenna gain patterns for the arrangement shown in Fig. 4A;

Fig. 5 shows an elevation pattern for the antenna;

Fig. 6 shows a feed network for a phased array antenna using helix antenna elements;

Fig. 7 shows inter-element distances for the array antenna of Fig. 6;

5 Fig. 8 shows an isometric view the antenna of Fig. 6;

Fig. 9 shows an antenna radiation pattern for the array antenna of Fig. 8;

Fig. 10 depicts an array antenna using helix elements each having 20 helical turns;

Fig. 11 shows an antenna radiation pattern for the array antenna of Fig. 10;

10 Fig. 12 shows two antenna arrays disposed on a common ground plane;

Fig. 13 shows an isometric view of the transmit/receive array of Fig. 12; and

Fig. 14 shows another array antenna using the helix antenna elements.

Detailed Description including Best Mode

Where reference is made in any one or more of the accompanying drawings to
15 steps and/or features, which have the same reference numerals, those steps and/or features
have for the purposes of this description the same function(s) or operation(s), unless the
contrary intention appears.

Fig. 1 shows the disclosed helix antenna. The antenna comprises a conductive
ground plane 106 above which is disposed a helical coil 104 (alternately referred to in this
20 description as a "helix", a "helical coil" or the like) that is electrically terminated at the
upper end of the helix 104 with a spiral 102. The helix antenna is depicted as having a
vertical axis 100.

In a preferred embodiment, the helical coil 104 comprises between 1.5 and 3.5
turns. However, other numbers of turns can be used. Furthermore, the helix 104 is
25 approximately one wavelength plus minus 10% of a wavelength in circumference. In

addition, the spiral 102 comprises between 2 and 4 turns, in a flat configuration normal to the axis 100.

Although the ground plane 106 is depicted as having a circular shape in Fig. 1, in fact the extent of the ground plane 106 is not critical, provided that it has an area greater than two thirds of a wavelength in diameter.

Fig. 2 shows a side view 224 of the helix 104 and the spiral 102, and also a plan view 232 thereof. Turning to the side view 224 the helix 104 has a first end 214 that is disposed a distance 216 above the ground plane 106. This first end 214 of the helix 104 has a radial position about the axis 100 as depicted by a reference numeral 214' in the plan view 232.

The helix 104, when wound in a clock-wise direction produces right hand circular polarization, and when wound in a counter-clockwise direction, produces left hand circular polarization. The number of turns of the helix can typically vary between 1.5 and 3.5, however the number of turns can be varied outside these limits.

The helix 104 in Fig. 2 depicts one example of a helix being wound in a counter-clockwise direction commencing from the first end 214 and comprises three and a quarter turns. The three and a quarter turns comprise a first turn 212-210, a second turn 208-206, a third turn 204-202, and a final quarter turn 200. The final quarter turn 200 of the helix 104 runs from a radial position depicted by the arrow 214' to a radial position depicted by the arrow 238 which is the upper end of the helix 104. The upper end of the helix is connected to the outer end of the spiral 102 at a radial position 238.

The first quarter turn of the helix 104, which extends from the first end 214 to a point 246, describes an angle 244 with respect to a dashed line 222. The remainder of the helix 104 is uniformly wound with a pitch angle 220, which can vary between 3 and 7 degrees, referred to the horizontal reference line 222. The angle 244 can be adjusted to achieve a desired impedance at the input of the helix 104. Although the angle is depicted

as being greater than the pitch angle 220, this is illustrative only, and other angles can be adopted according to the desired impedance. Furthermore, although an abrupt change between the angles 244 and 220 occurs at the point 246 in Fig. 2, in practice a smooth angular transition can be used.

5 The angle 244, together with the distance 216 of the helix first end 214 from the ground plane 106 establishes a distance 228 which is located a quarter turn from the helix first end 214. The radial location of the distance 228 is depicted by the reference numeral 238 in the plane view 232. The one quarter turn segment of the helix 104 between 214 and 238 forms a tapered transmission line with the ground plane 106. As noted, the
10 distance 216 can be advantageously adjusted, for example by adjusting the angle 244, in order to match an input impedance of the helix 104 as desired.

 The helix 104 has a second end 242 that is situated, in the present arrangement, three and a quarter turns from the first end 214 of the helix 104. The spiral 102 is connected by an outer end thereof to the second end 242 of the helix 104 at a radial
15 location depicted by the reference numeral 238. The spiral 102 has a uniform inter-turn pitch distance 236, and spirals inwards from the aforementioned outer end that is connected to the second end 242 of the helix, to an inner end 234 of the spiral 102. Other types of spiral can also be used.

 In a preferred arrangement the spiral 102 is located in a plane horizontal to the
20 axis 100. The spiral 102 can however, in other arrangements, be formed to have a conical shape pointing either upwards or downwards.

 Instead of a tapered transmission line being formed using the one quarter turn segment of the helix 104 between 214 and 238 and the ground plane 106, other impedance matching techniques such as quarter wave transmission line matching sections
25 can be used to connect the first end 214 of the helix 104 to the intended communication apparatus thereby achieving the desired impedance matching.

The helix can be made of wire, wound on a low loss, low dielectric constant former to support the helix and spiral. Alternately, the helix can be etched in copper on a thin low loss dielectric film which is then rolled to form a cylinder. Either method provides the necessary mechanical support for reliable operation and causes minimal disturbance to the radiated wave.

This antenna element can be advantageously used in the frequency band between 1 GHz and 8 GHz, however it can also be used outside this frequency band. Furthermore, the addition of the spiral 102 to terminate the helix 104 is found to provide improved beam shaping and a significant decrease in the antenna axial ratio. The antenna is ideally suited for two-way communications via satellite to vehicles, vessels or aircraft. The antenna is a compact, low profile radiator exhibiting circular polarisation, making it ideally suited for use where size and performance are paramount such as in marine, aeronautical and land transport services.

Fig. 3 shows a typical radiation pattern for the antenna of Fig. 1. which is seen to have high radiated power gain compared to other types of antenna of similar dimensions.

The antenna of Fig. 1 has a low profile and a compact structure, thereby making it an ideal radiator when used alone. It can also be used as a radiating element in an antenna array. A further advantage is that since the antenna provides higher individual antenna gains than, for example, patch antenna elements, the complex phasing networks that are required in order to drive multiple antenna elements in a phased array can be replaced with a simple low loss antenna switching network in order to select individual antenna elements according to the direction required.

Fig. 4A shows a partial switched-element arrangement 400. A general omnidirectional antenna arrangement uses a series of 6 to 8 switched elements comprising small antennas according to the arrangement of Fig. 1, each antenna having a peak gain of at least 8 dBi after switching network losses. The depiction in Fig. 4A is directed to a

single 90° quadrant between dashed lines 404 and 422 for ease of description. Three antenna elements 406, 402 and 420 are disposed on an antenna housing 418. The antenna elements 406, 402 and 420 are arranged so that their beam angles point in respective directions depicted by the dashed arrows 404, 424 and 422. The antenna elements 406, 402 and 420 are connected by respective feed lines 410, 416 and 414 to a switch arrangement 408, and thence by means of a connection 412 to the communications apparatus. The apparatus can be a transmitter, a receiver, or a duplexer to which both are connected for simultaneous transmit/receive.

It will be apparent that antennas according to the arrangement of Fig. 1 can also be incorporated into a phased array by introducing a phased array feed network, instead of the switched feed network shown in Fig. 5A, to thereby form a phased array antenna. This is described in more detail in regard to Figs. 6-14.

Fig. 4B depicts antenna beams 426, 430 and 434 that are associated with the respective antenna elements 406, 402 and 420, the beams being orientated along directions depicted by dashed arrows 404', 424' and 422' which correspond to respective directions 404, 424 and 422 in Fig. 4A.

From an operational perspective the beam 426, for example, can be selected by switching the line 412 to the feed line 410 using the switching arrangement 408. Similarly, the beam 434 can be selected by switching the connection 412 to the feed line 414 using the switching arrangement 408, and so on.

Fig. 5 shows an elevation pattern for the antenna shown in Fig. 1. The peak antenna gain is in excess of 9 dB, with broad coverage over elevation angles from 20 to 70 degrees.

The coverage at the zenith may be improved, if required, by incorporating an extra antenna element pointing to the zenith. This element is connected to the switched array 400, for example, to provide coverage at the zenith.

A single helix with only approximate manual pointing of the antenna would also
5 be attractive for non-mobile applications.

Fig. 6 shows a feed network 600 for a phased array antenna using five helix antenna elements as previously described, these antenna elements being arranged in a domino configuration. The feed network depicted in Fig. 6 can be implemented in a number of different ways, including microstrip and stripline, for example. When the
10 array antenna in Fig. 6 is used as a transmitting array, a signal 602 is input at 603 and flows through a divider network 604. Energy flows to another divider 605 and is distributed along feed-lines 613 and 614 to respective helix antenna elements 601 and 608. The aforementioned helix antenna elements are shown in dashed form in order not to obscure details of the feed network 600.

15 The input signal 602 is also distributed by the divider 604 to another divider 606 which provides energy along a feed-line 616 to a helix antenna element 615. The divider 606 also provides signal power to another divider 607 which provides signal along respective feed arms 610 and 611 to respective helix antenna elements 609 and 612.

The feed network 600 is depicted in Fig. 6 as a component in a transmitting
20 array, however it is apparent that the same antenna array can be used as a receive antenna array, in which case the arrow would be directed in the opposite direction.

Equal feed-line lengths are used from the input 603 to each of the radiating elements 601, 608, 615, 609 and 612 in the arrangement 600. Furthermore, the energy delivered to each of the radiating elements is equal, and thus "uniform amplitude
25 weighting" is used in the example shown. It is apparent, however, that variations in feed-line lengths and/or amplitude weighting can be used to achieve specific array antenna

characteristics. The antenna elements 601, 608, 615, 609 and 612 are disposed on a common ground plane such as 1211 in Fig. 13.

Fig. 7 shows a plan view 700 of the helix antenna elements 601, 608, 615, 609 and 612 without the feed network 600. The central helix antenna element 615 is located at a radial inter-element distance 702 from the antenna element 601. The radial inter-element distance 702 can vary between 0.5λ and 2.5λ at the frequency of operation of the antenna array. Radial inter-element distances 705, 706 and 703 are equal to the radial inter-element distance 702. An inter-element distance 701 between the helix antenna elements 601 and 608 can corresponding vary between 0.7λ and 3.5λ at the frequency of operation of the antenna array. Inter-element distances 704, 708 and 707 are equal in length to the inter-element spacing 701. The inter-element spacings described in relation to Fig. 7 are also applicable to the other array antenna arrangements described in relation to Figs. 8, 10, 12, 13 and 14.

Fig. 8 show an isometric view 800 of five helix antenna elements 801-805, each having five helical turns, that are disposed on a common ground plane with inter-element spacings as shown in Fig. 7. Each helix antenna element 801-805 is shown positioned on a ground plane segment 806, however as noted, all the antenna elements 801-805 are mounted on a common ground plane as will be shown in Fig. 13, for example.

Fig. 9 shows an antenna radiation pattern 900 for the array antenna of Fig. 8. The gain of the array antenna is plotted against a vertical access 901 depicting power gain in dB and against a horizontal axis 902 which represents angular deviation in degrees. The angular deviation of the horizontal axis 902 is measured with respect to a "boresite" axis of the array depicted in Fig. 8. For the array of Fig. 8, the boresite is the axis of the helix 803, which is equivalent to the axis 100 in Fig. 1. Three antenna gain patterns, depicted by reference numerals 903-905, are shown in Fig. 9, depicting the gain for the

array antenna of Fig. 8 measured at relative lateral orientations of 0, 45 and 90 degrees for the array antenna 800.

Fig. 10 depicts an array antenna 1000 similar to that shown in Fig. 8, but using helix elements each having 20 helical turns. It has been found that as the number of turns in the helix element increases, the antenna element axial ratio decreases as well, thereby reducing the need for the spiral terminating element. The helix pitch angle 220 (see Fig. 2) which for low profile helix elements such as are illustrated in Fig. 2 can vary between 3 and 7 degrees referred to the horizontal reference line 222, increases as the number of turns in the helix element increases, the pitch increasing to a value lying between 10 – 14 degrees. The array 1000 comprises 5 helix antenna elements 1001-1005 which are disposed in a similar pattern to that shown in Fig. 8. The helix elements 1001-1005 are disposed on a common ground plane depicted by 1006.

Fig. 11 depicts an array gain radiation pattern 1100 for the array antenna 1000 of Fig. 10. The radiation pattern is plotted against a vertical axis 1101 depicting power gain in dB and a horizontal axis 1102 depicting angular deviation in degrees from the boresite axis of the array antenna 1000. Three gain patterns 1103-1105 are plotted in Fig. 11, depicting the array antenna gain at relative lateral rotations of 0, 45 and 90 degrees for the array antenna 1000.

Fig. 12 shows how two antenna arrays such as those depicted in Figs. 8 and 10 can be disposed on a common ground plane in order to act, for example, as respective transmit and receive arrays. In Fig. 12 one array is depicted by large hashed circles 1201-1205, while the second array is depicted by smaller hashed-circles 1206-1210. The array constituted by the radiating elements 1206-1210 is laterally rotated with respect to the array consisting of the radiating elements 1201-1205 in order to maximise the inter-element spacing between elements of the two arrays. The inter-element spacing within each distinct array is consistent with the inter-element spacings described in relation to

Fig. 7. In Fig. 12 the relative inter-element spacing for the two depicted arrays is different since they operate at different frequencies, one frequency being allocated to the transmit function, and the other frequency being allocated to the receive function.

Fig. 13 shows an isometric view 1300 of the transmit/receive array of Fig. 12.

5 The individual radiating elements 1201-1205 for the one array and 1206-1210 for the second array are shown mounted on a common ground plane 1211. The central radiating element 1208 is located within the central radiating element 1203.

Fig. 14 shows another arrangement 1400 of an array antenna using the helix antenna elements described in relation to Figs. 8, 10 and 13. In Fig. 14 helix radiating
10 elements 1401-1416 are arranged in a rectangular grid arrangement with horizontal inter-element spacings depicted by an arrow 1418 and vertical inter-element spacings depicted by an arrow 1417.

Industrial Applicability

It is apparent from the above that the arrangements described are applicable to
15 the mobile communication industry.

The foregoing describes only some embodiments of the present invention, and modifications and/or changes can be made thereto without departing from the scope and spirit of the invention, the embodiments being illustrative and not restrictive.

Claims:

1. An antenna element comprising:
a ground plane:
5 a helix disposed above the ground plane, the helix being connectable to a communications apparatus at a helix end located near the ground plane; and
a spiral substantially centred on the axis of the helix the spiral having an outer end thereof connected to the other helix end, said spiral thereby terminating the antenna.
- 10 2. An antenna element according to claim 1, wherein the axis of the helix is substantially perpendicular to the ground plane.
3. An antenna element according to claim 1, wherein the spiral lies in a flat plane that is substantially perpendicular to the axis of the helix.
- 15 4. An antenna element according to claim 1, further including a tapered transmission line connected between the communications apparatus and the end of the helix located near the ground plane.
- 20 5. An antenna element according to claim 1, wherein:
the helix has (a) between 1.5 and 3.5 turns, (b) a pitch angle of between 3 and 7 degrees, and (c) a circumference of between 0.9 and 1.15 wavelengths; and
the spiral has between 1 and 4 turns.
- 25 6. An antenna element according to claim 1, wherein:

the helix has (a) between 3.5 and 40 turns, (b) a pitch angle of between 10 and 14 degrees, and (c) a circumference of between 0.9 and 1.15 wavelengths; and
the spiral has between 1 and 4 turns.

5 7. An antenna comprising:

a switched element feed network having an equipment feed-line for connection to communication apparatus and a plurality of element feed-lines for connection to a like plurality of antenna elements, said switched element feed network being adapted to connect a selected one of the antenna elements to the communication apparatus; and

10 said plurality of helix antenna elements according to claim 1, said helix antenna elements being disposed above said ground plane, each said helix antenna element being individually connectable at a respective helix end located near the ground plane to a respective element feed-line of the switched element feed network to thereby connect to the communications apparatus.

15

8. An antenna comprising:

a phased array feed network having an equipment feed-line for connection to communication apparatus and a plurality of element feed-lines for connection to a like plurality of antenna elements, said phased array feed network being adapted to
20 collectively connect said plurality of antenna elements to the communication apparatus;
and

said plurality of helix antenna elements according to claim 1, said helix antenna elements being disposed above said ground plane, each said helix antenna element being individually connectable at a respective helix end located near the ground plane to a
25 respective element feed-line of the phased array feed network to thereby connect to the communications apparatus.

9. An antenna according to claim 8, wherein the plurality of helix antenna elements are arranged in a domino pattern.

5 10. An antenna comprising:

a phased array feed network having an equipment feed-line for connection to communication apparatus and a plurality of element feed-lines for connection to a like plurality of antenna elements, said phased array feed network being adapted to collectively connect said plurality of antenna elements to the communication apparatus;

10 and

said plurality of helix antenna elements arranged in a domino pattern, each said helix antenna element comprising a ground plane, and a helix disposed above the ground plane, the helix being connectable to a communications apparatus at a helix end located near the ground plane, each said helix antenna element being individually connectable at
15 a respective helix end located near the ground plane to a respective element feed-line of the phased array feed network to thereby connect to the communications apparatus.

11. An antenna according to claim 9 or claim 10, wherein:

the radial inter-element spacing between the centre antenna element and antenna
20 elements at said corners of the domino pattern is between 0.5λ and 2.5λ at the frequency of operation of the antenna.

12. An antenna having two antennas according to claim 9 or claim 10, wherein:

a centre helix antenna element of a first of said two antennas is co-located with a
25 centre helix antenna element of a second of said two antennas; and

the first of said two antennas is laterally rotated with respect to the second of said two antennas, said lateral rotation being about a common axis of the co-located centre helix antenna elements to thereby change inter-element spacing between antenna elements of said two antennas.

5

13. An antenna comprising:

a ground plane:

a plurality of helix elements disposed above the ground plane, each said helix being connectable, via a respective feed line of an associated phased array feed network to a communications apparatus, at a helix end located near the ground plane; and

10

a like plurality of spirals, each substantially centred on the axis of the corresponding one of the plurality of helix elements, said each spiral having an outer end thereof connected to the other helix end of the corresponding one of the plurality of helix elements, said spiral thereby terminating the corresponding helix element.

15

14. An antenna comprising:

a ground plane:

a plurality of helix elements disposed above the ground plane, each said helix being connectable, via a respective feed line of an associated switched element feed network to a communications apparatus, at a helix end located near the ground plane; and

20

a like plurality of spirals, each substantially centred on the axis of the corresponding one of the plurality of helix elements, said each spiral having an outer end thereof connected to the other helix end of the corresponding one of the plurality of helix elements, said spiral thereby terminating the corresponding helix element.

25

15. An antenna comprising:

a phased array feed network having an equipment feed-line for connection to communication apparatus and a plurality of element feed-lines for connection to a like plurality of antenna elements, said phased array feed network being adapted to collectively connect said plurality of antenna elements to the communication apparatus;
5 and

said plurality of helix antenna elements according to claim 1, said helix antenna elements being disposed above said ground plane and arranged in a rectangular grid pattern having a first spacing between rows of said rectangular grid pattern and a second spacing between columns of said rectangular grid pattern, each said helix antenna element
10 being individually connectable at a respective helix end located near the ground plane to a respective element feed-line of the phased array feed network to thereby connect to the communications apparatus.

16. An antenna comprising:


15 a phased array feed network having an equipment feed-line for connection to communication apparatus and a plurality of element feed-lines for connection to a like plurality of antenna elements, said phased array feed network being adapted to collectively connect said plurality of antenna elements to the communication apparatus;
and

20 said plurality of helix antenna elements being disposed above said ground plane and arranged in a rectangular grid pattern having a first spacing between rows of said rectangular grid pattern and a second spacing between columns of said rectangular grid pattern, each said helix antenna element being individually connectable at a respective helix end located near the ground plane to a respective element feed-line of the phased
25 array feed network to thereby connect to the communications apparatus.

- 19 -

17. A method of impedance matching an antenna element wherein the antenna element comprises a ground plane, a helix disposed above the ground plane, the helix being connectable to a communications apparatus at a helix end located near the ground plane, and a spiral substantially centred on the axis of the helix the spiral having an outer
5 end thereof connected to the other helix end, said spiral thereby terminating the antenna, said method comprising the steps of:

adjusting a distance, from the ground plane, of the helix end located near the ground plane to thereby adjust the impedance of a tapered transmission line formed between the ground plane and a first quarter turn of the helix.

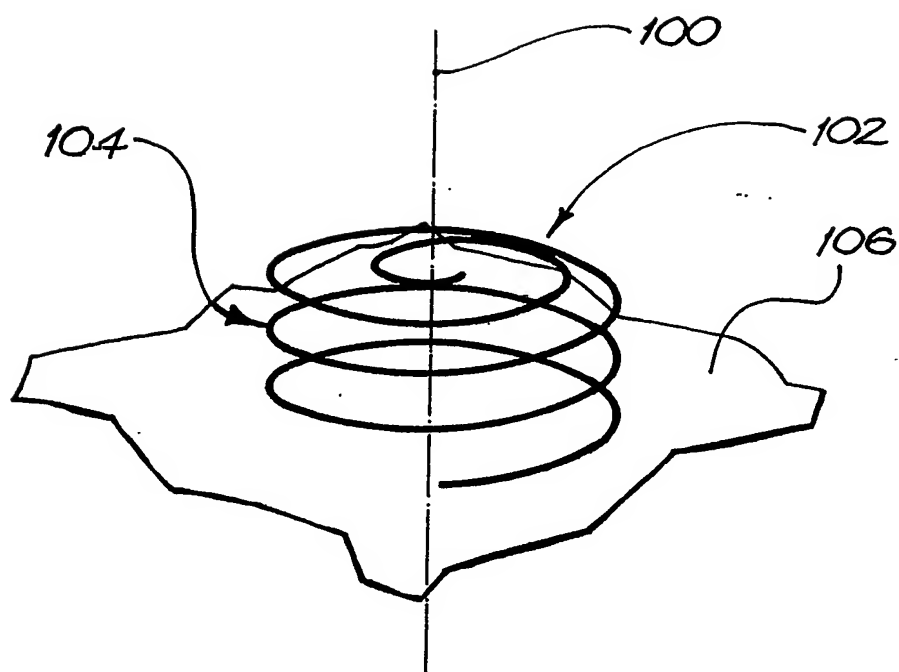*FIG. 1*

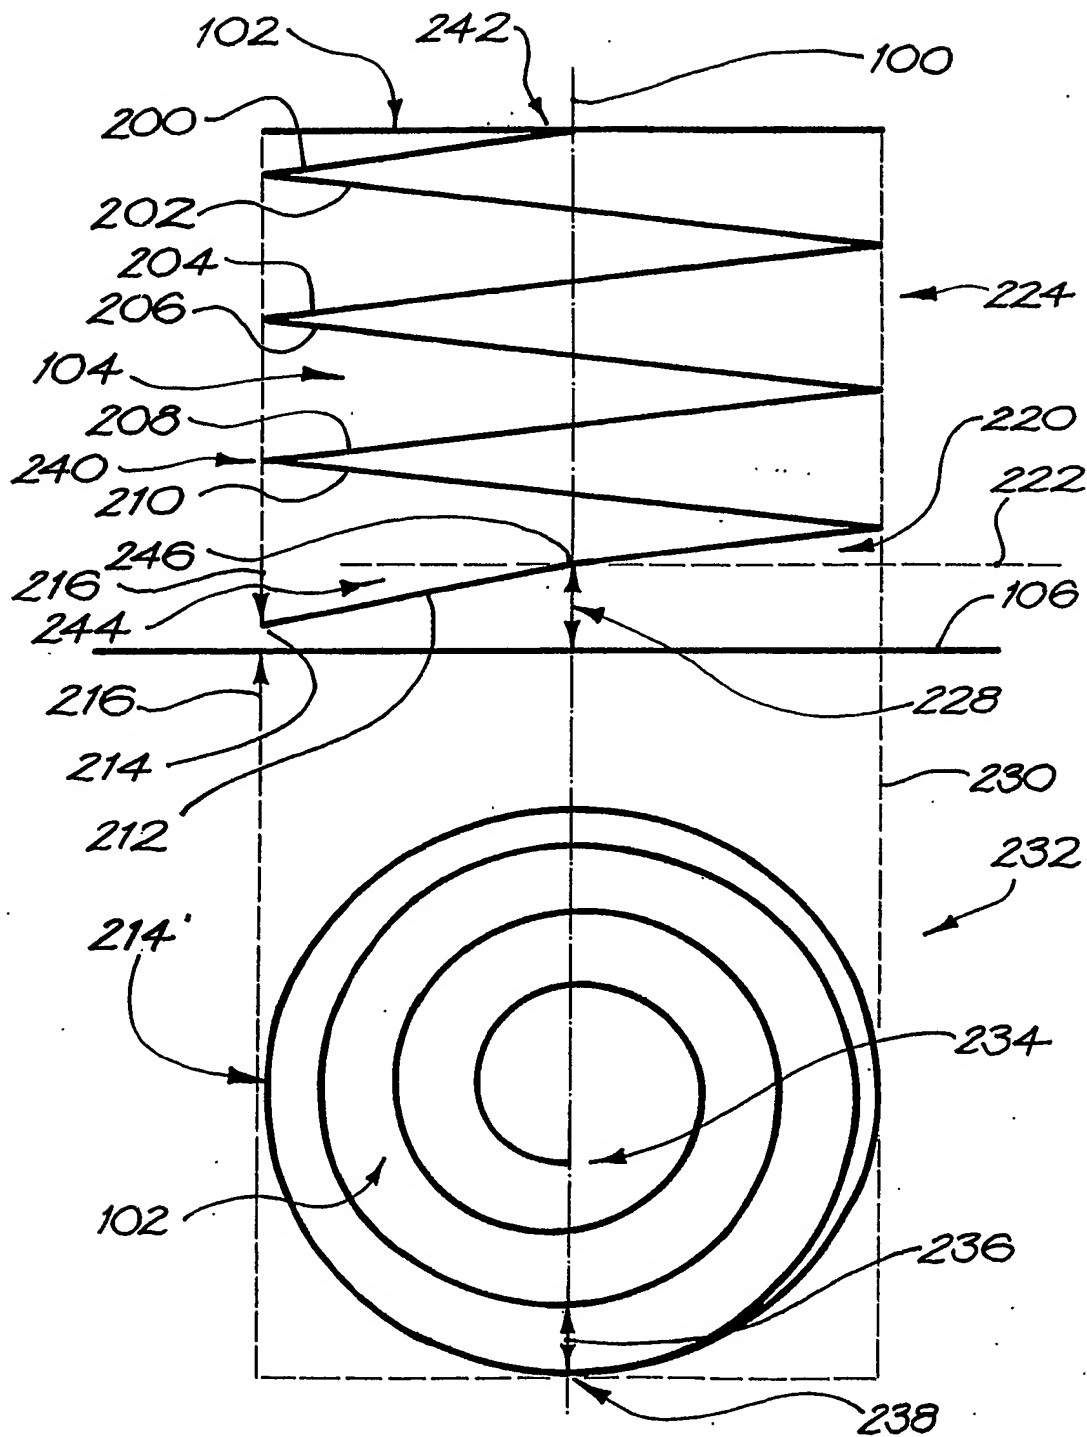
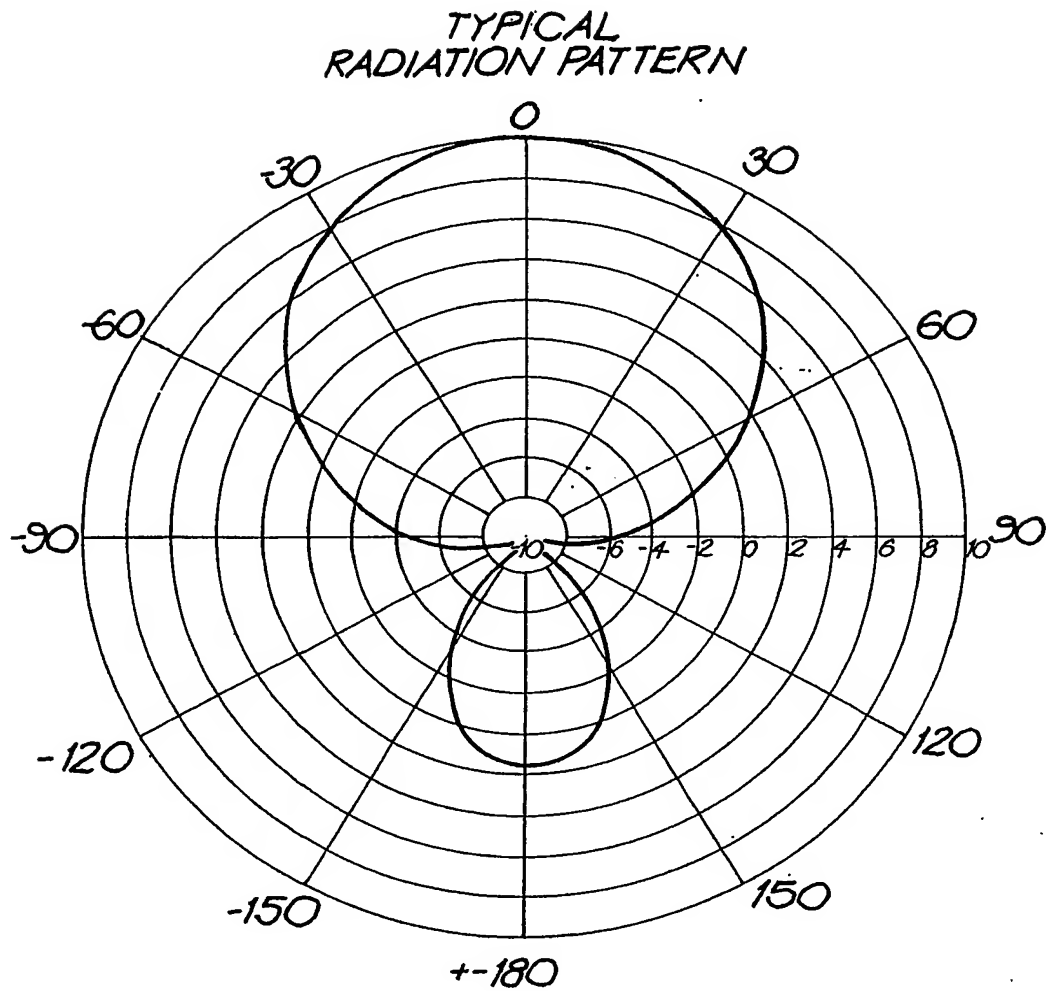


FIG. 2

3/14

**FIG. 3**

4/14

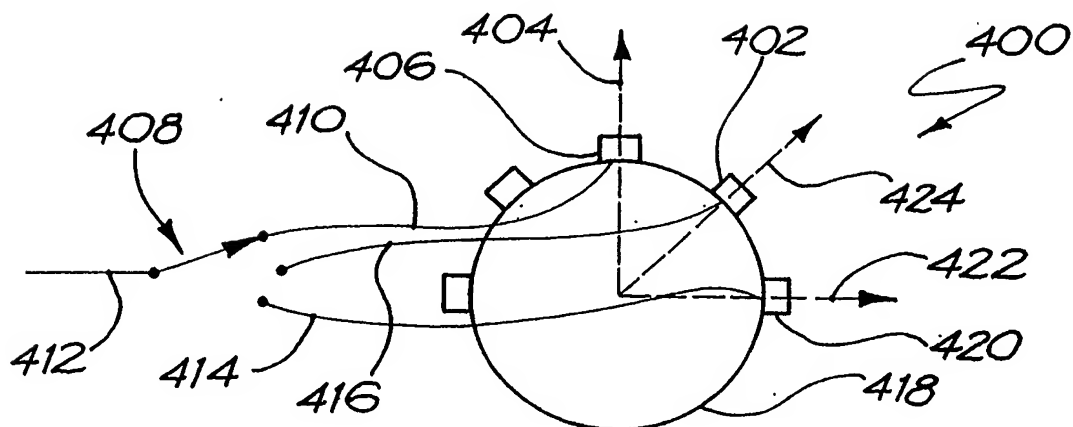


FIG. 4A

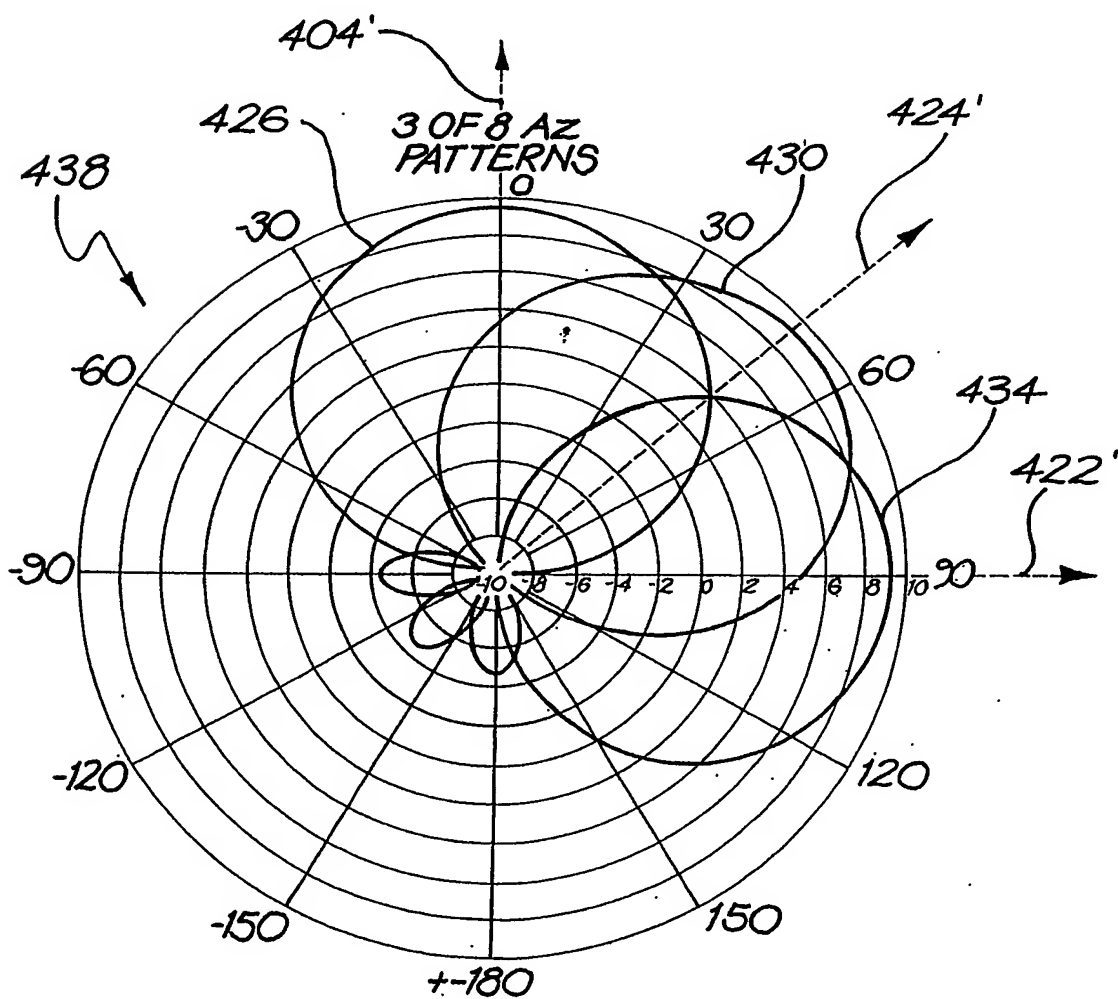
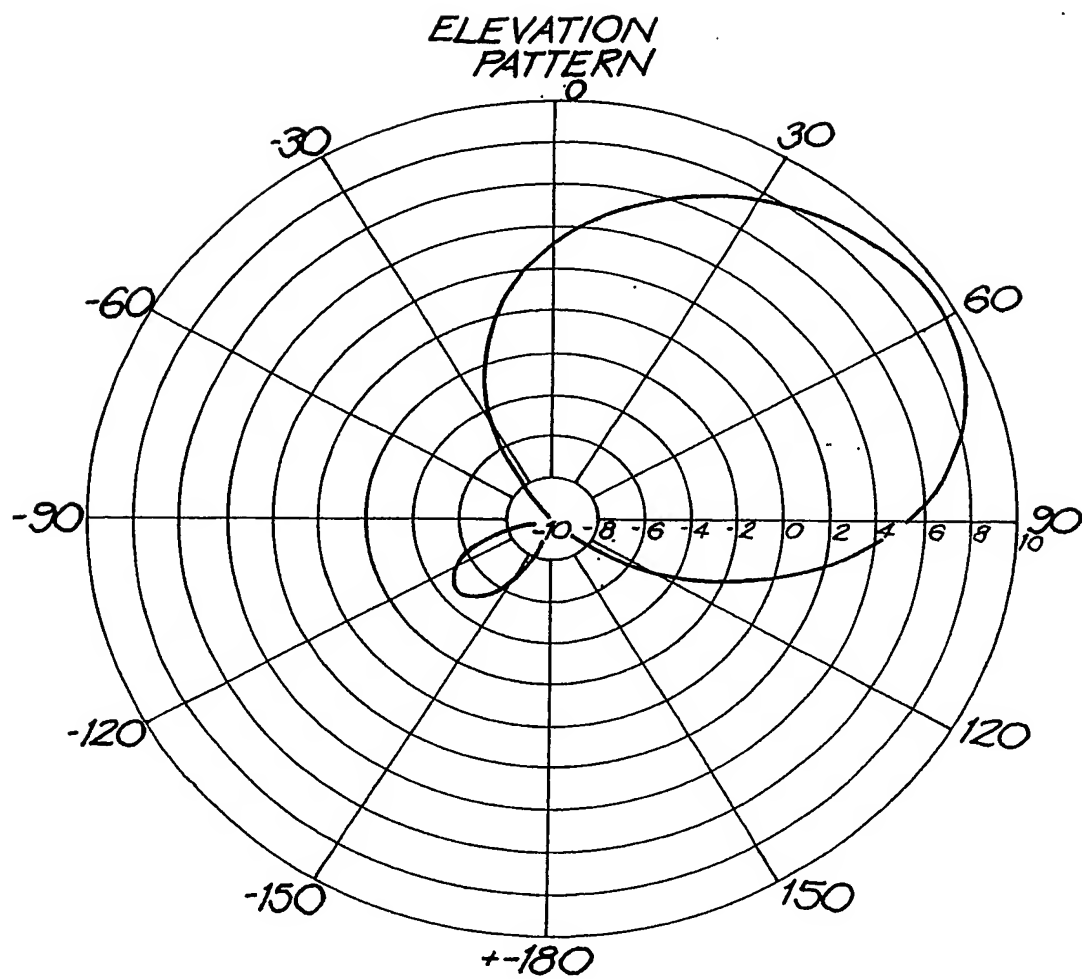


FIG. 4B

5/14

*FIG. 5*

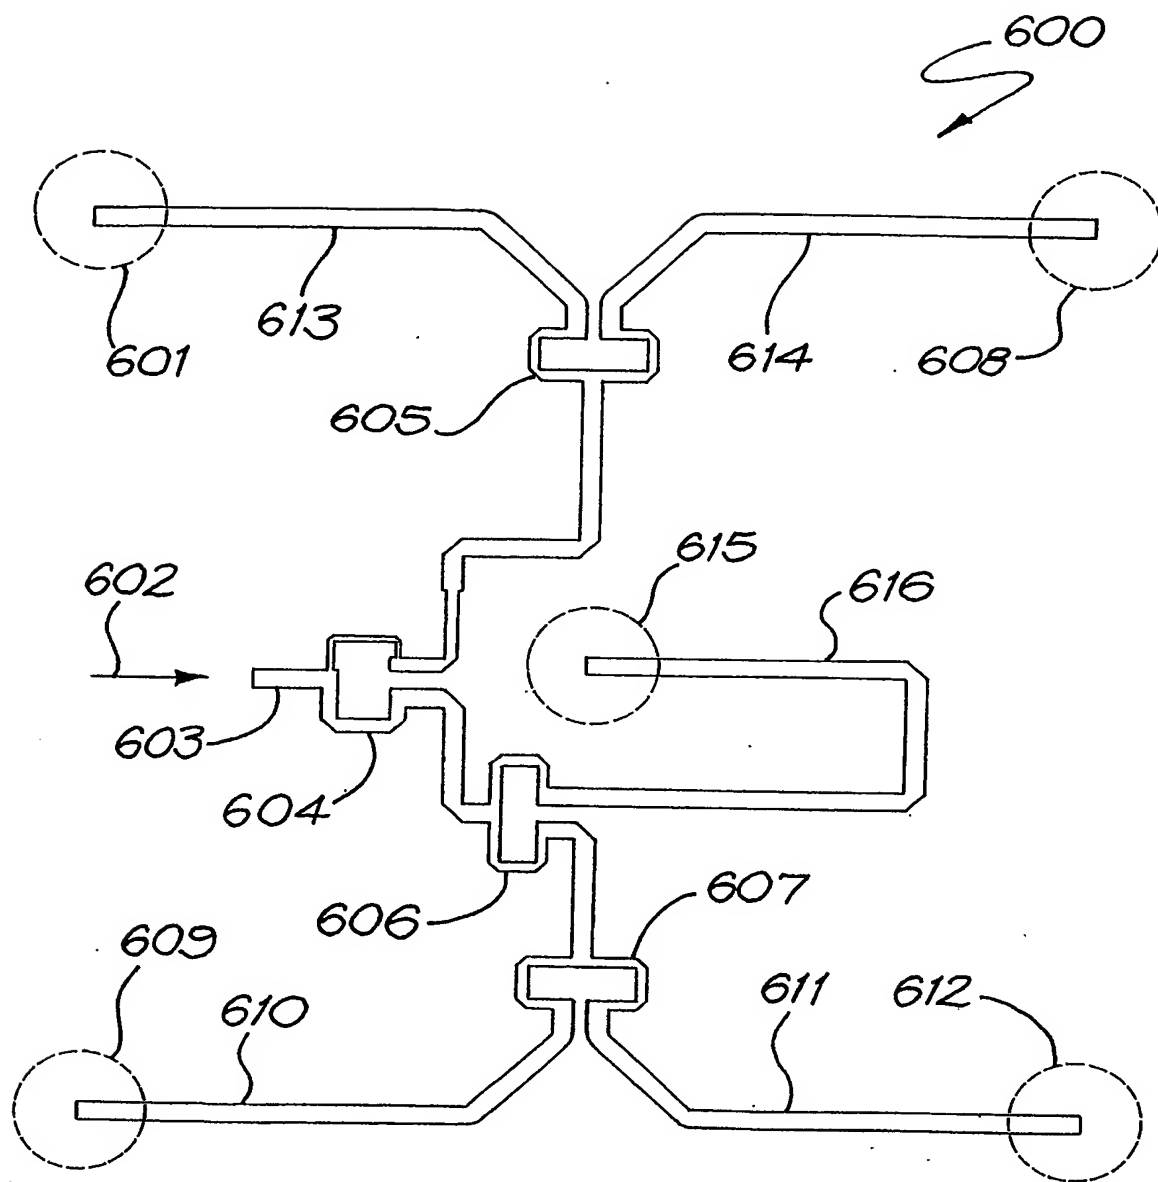
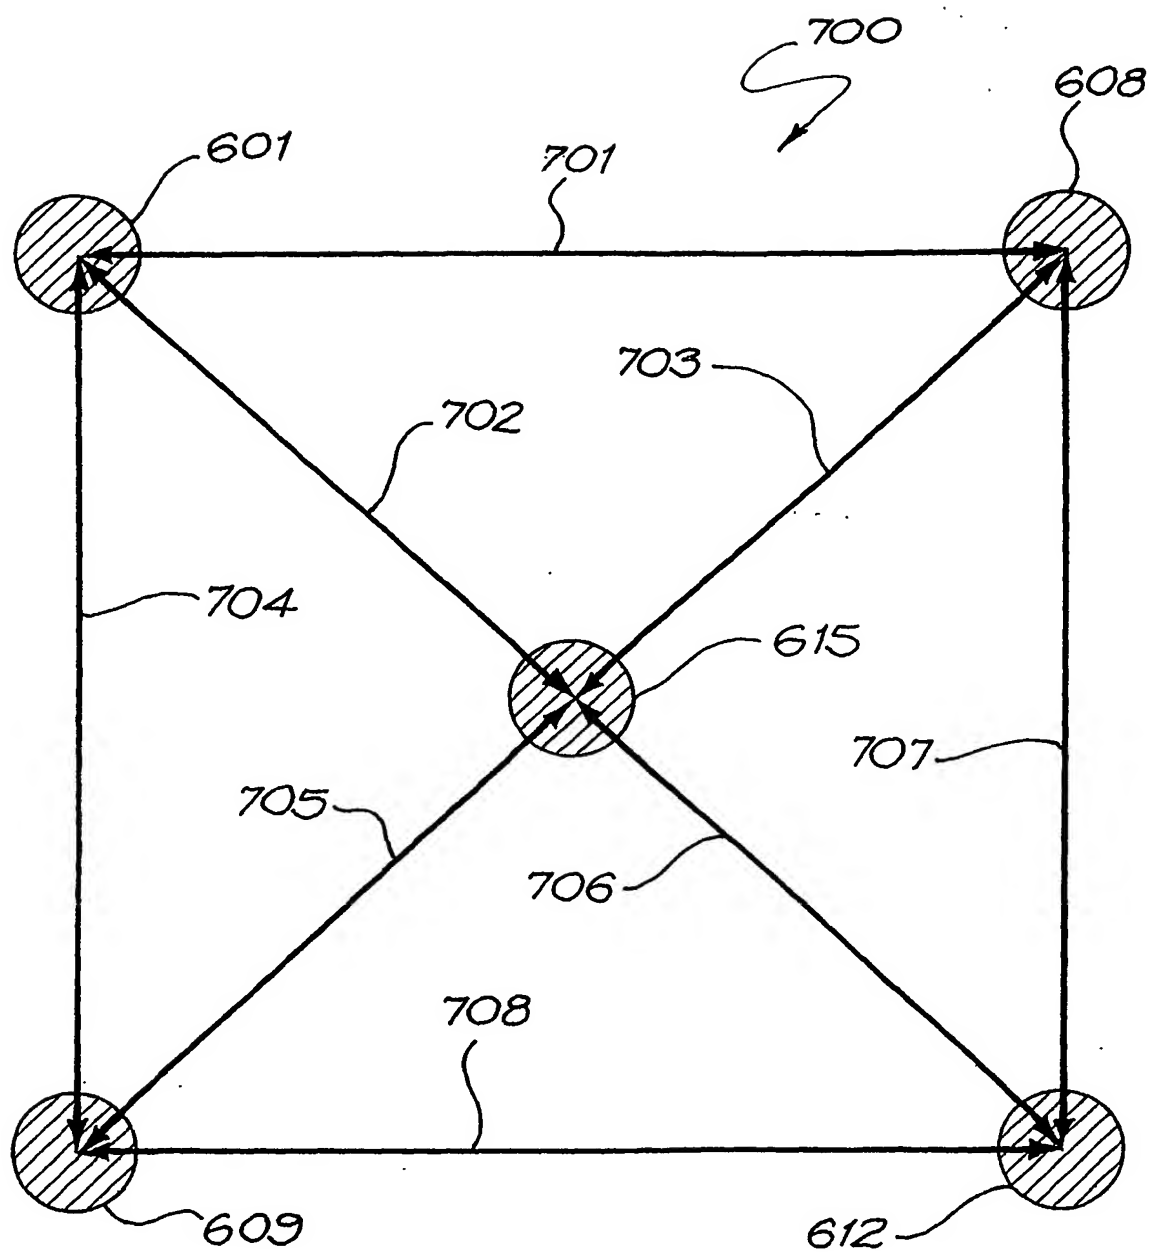


FIG. 6

7/14

**FIG. 7**


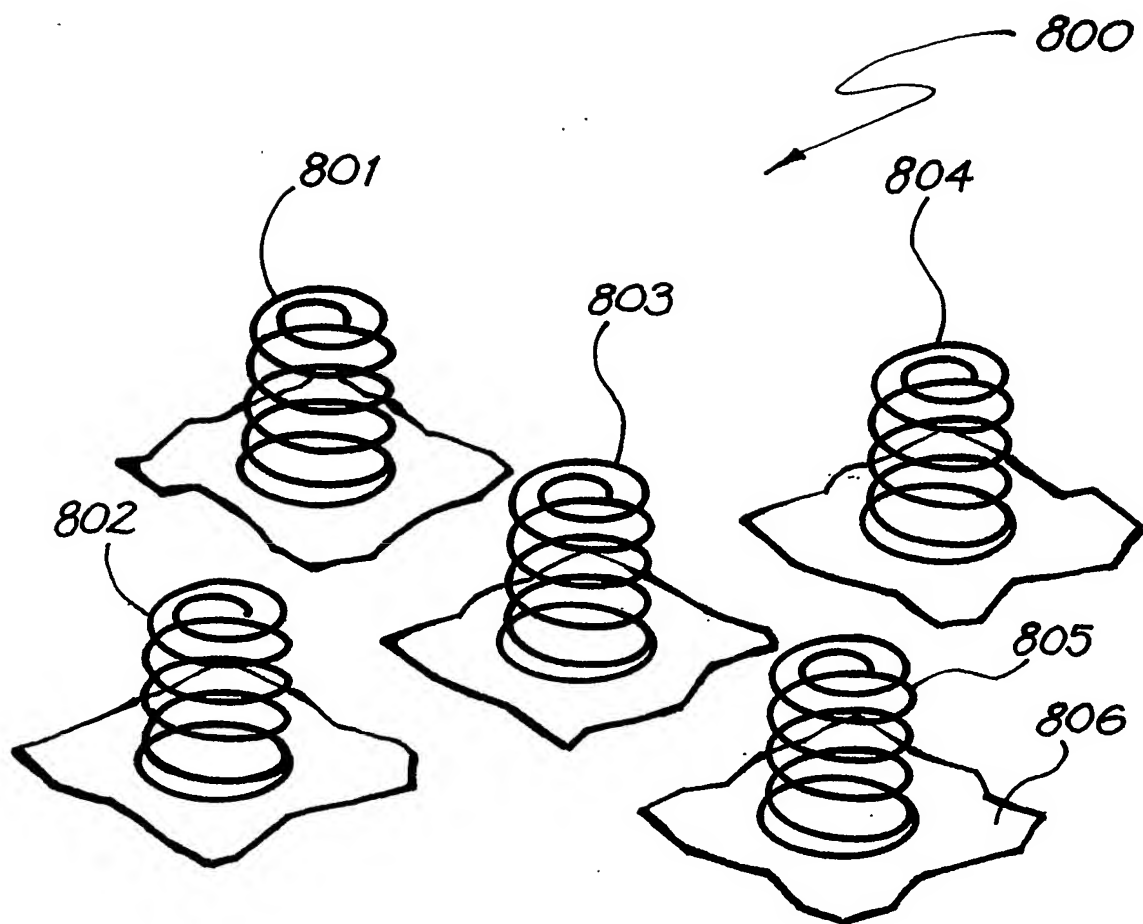


FIG. 8

9/14

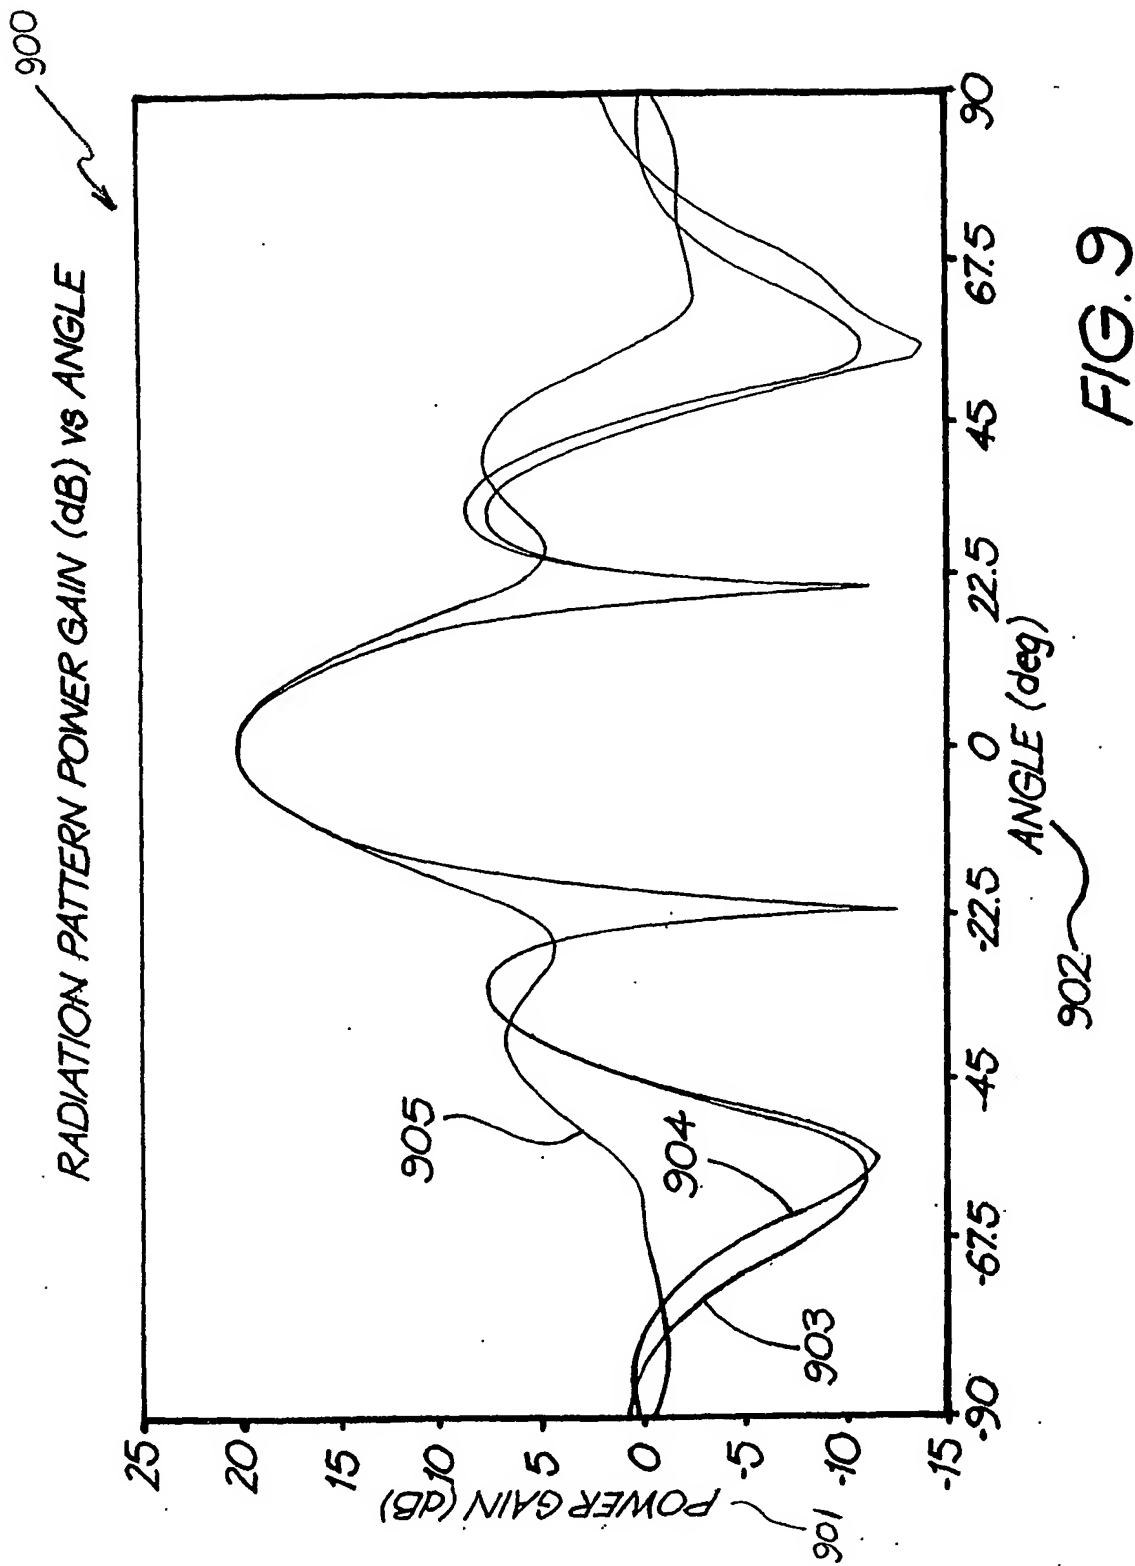

10/14

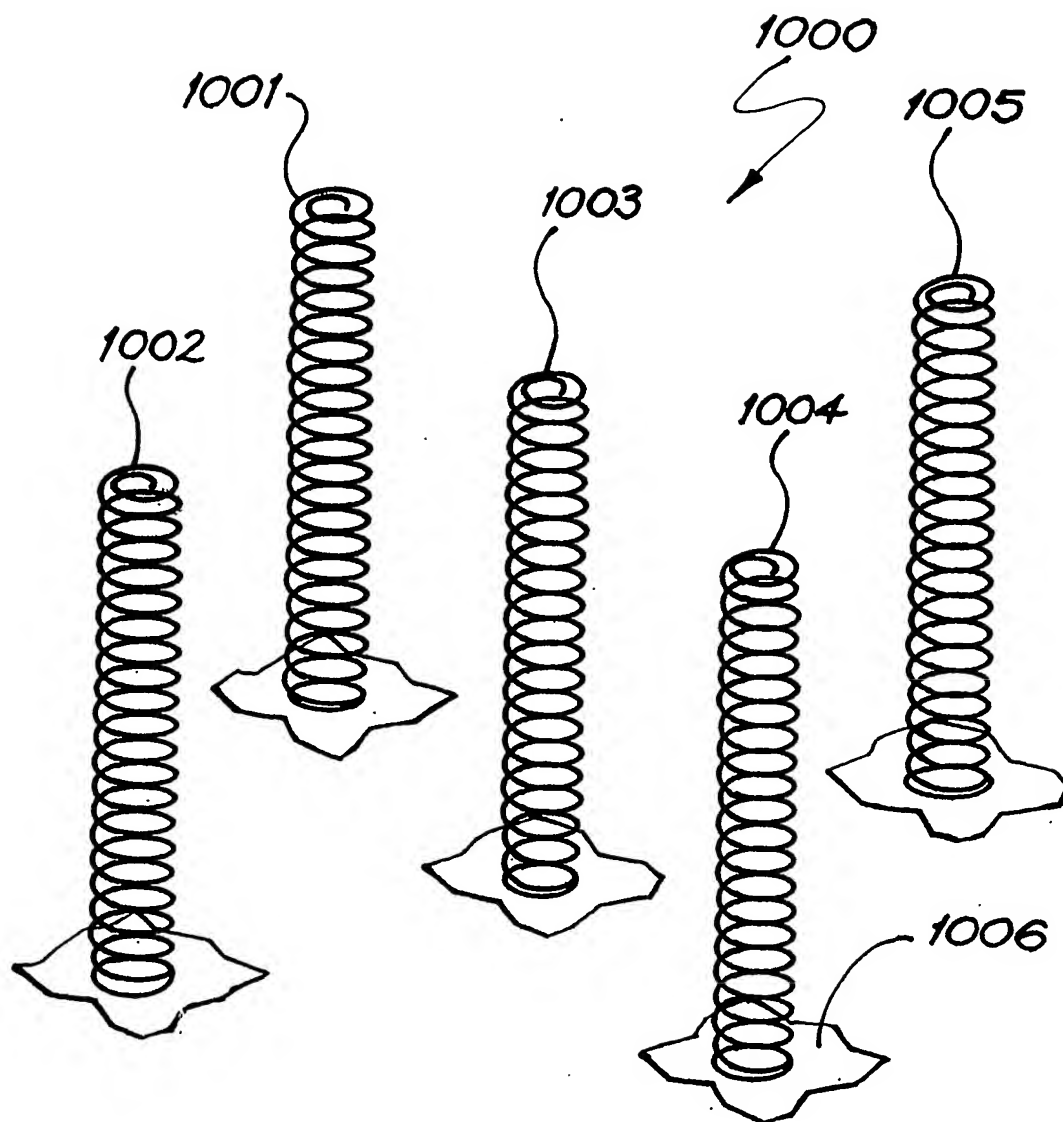


FIG. 10

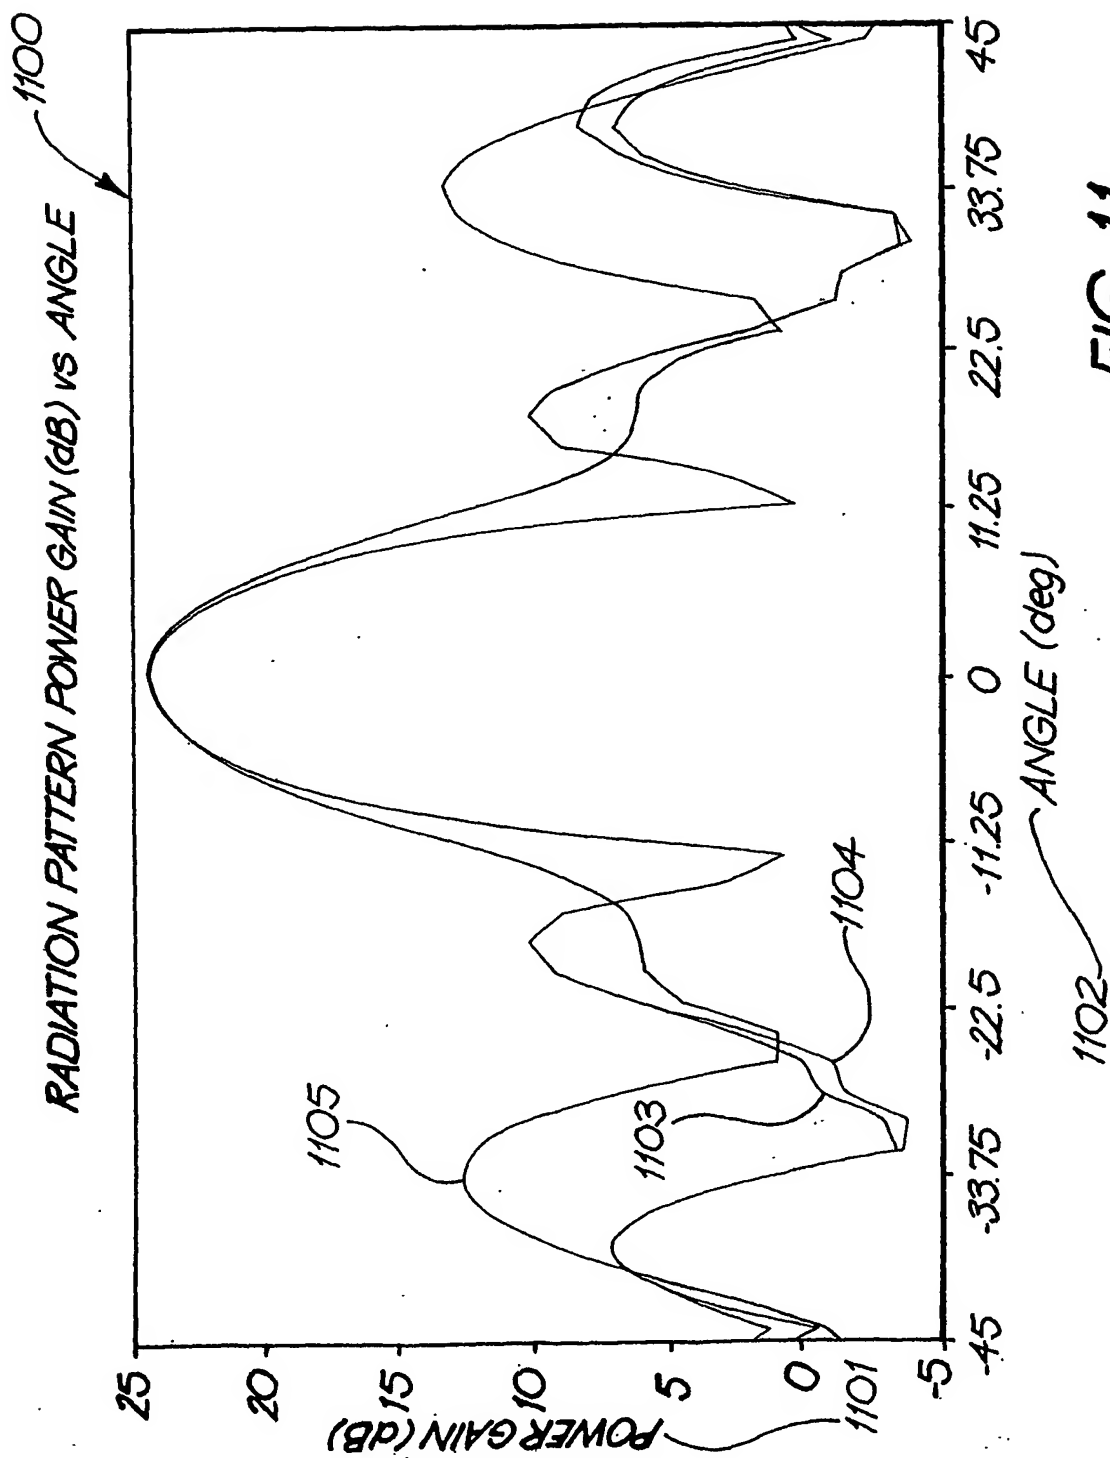


FIG. 11

12/14

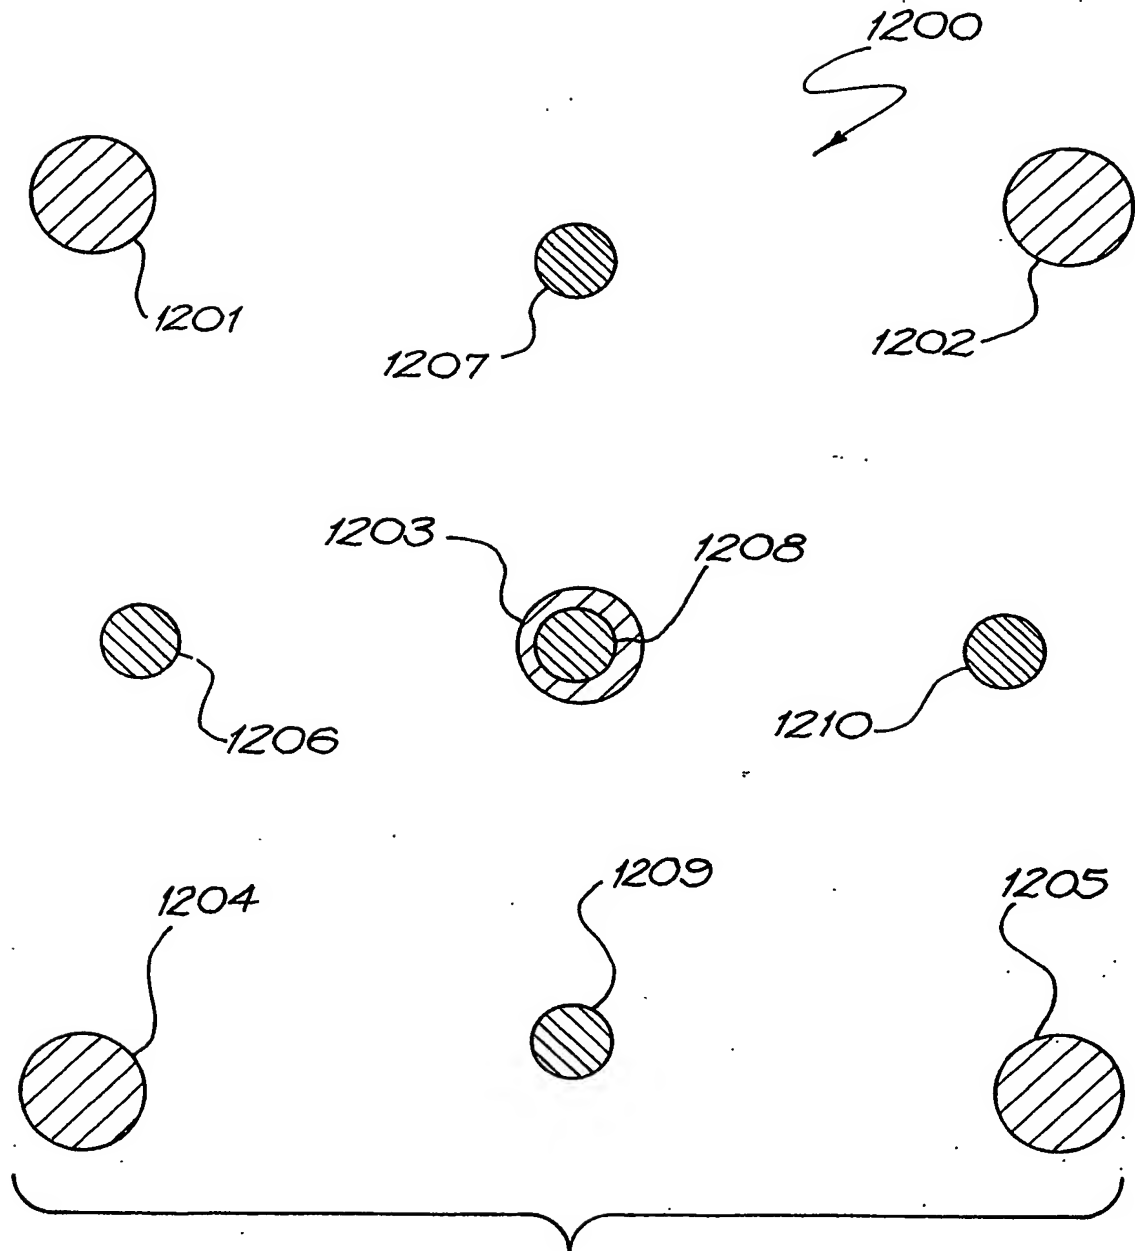


FIG. 12

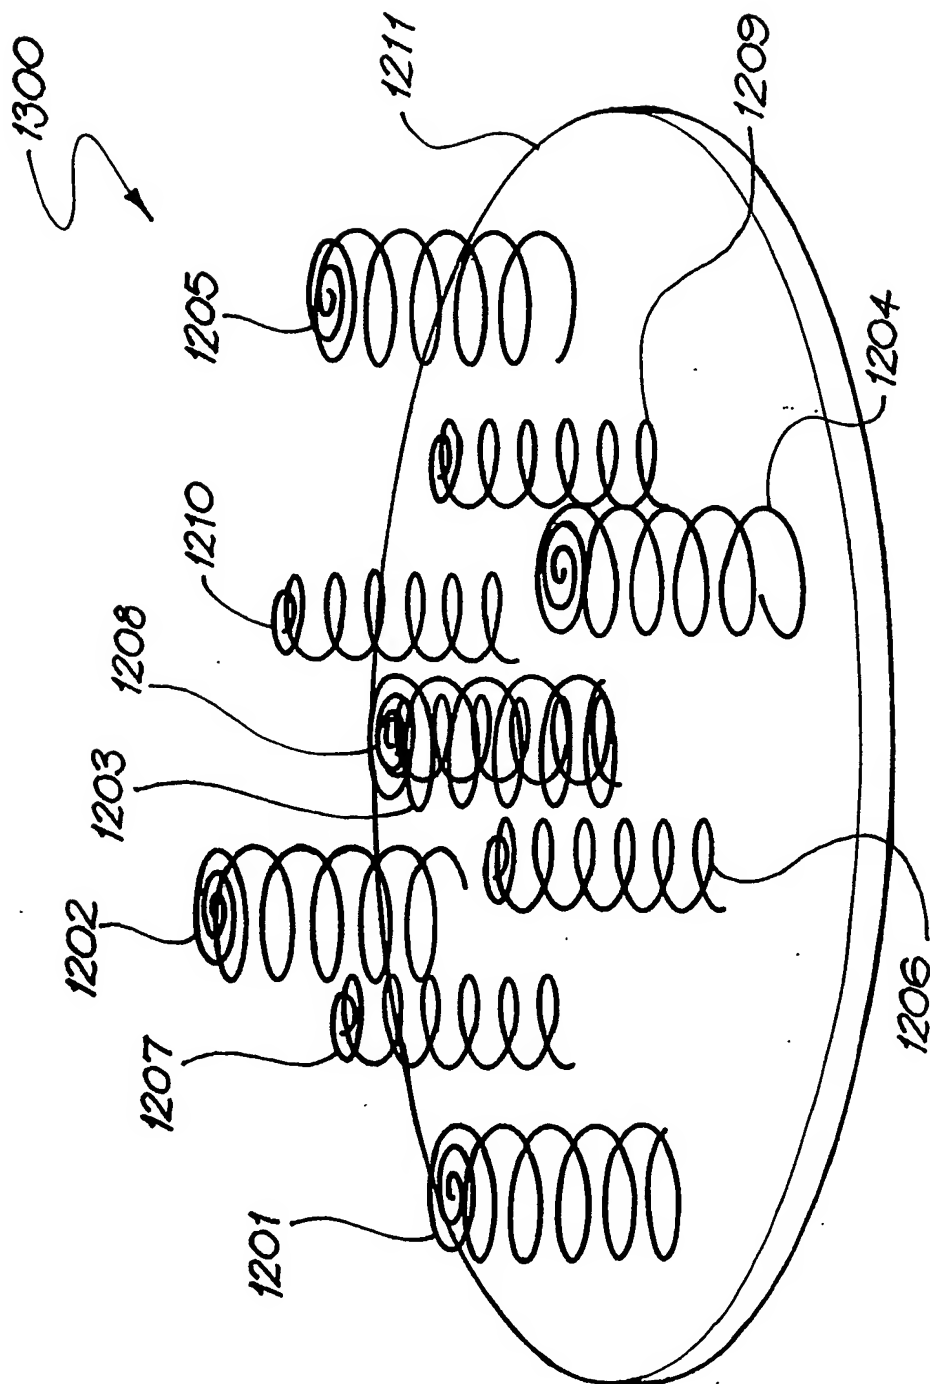
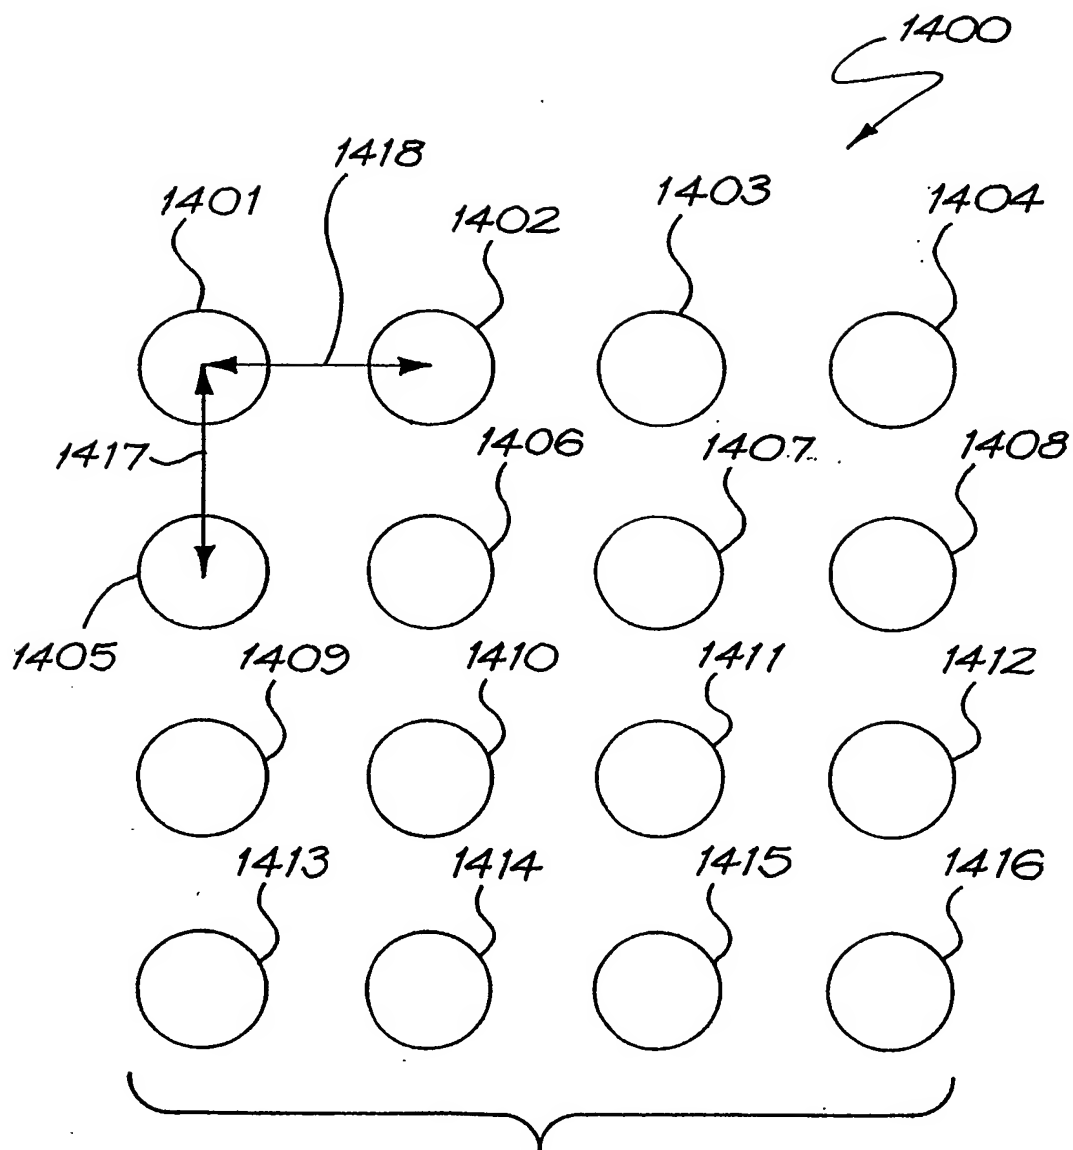


FIG. 13

**FIG. 14**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU03/00690

A. CLASSIFICATION OF SUBJECT MATTERInt. Cl. ⁷: H01Q 11/08, 1/36, 21/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPAT keywords: antenna, aerial, helix, helical, spiral, ground, plane and similar terms

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 5345248 A (HWANG et al) 6 September 1994 column 1 lines 42-49, column 4 lines 14-25, Figs 1, 2, 4, 6	1-8, 10-11, 13, 14, 17 9-12, 15-16
X Y	Patent Abstracts of Japan, JP 08-078946 (MITSUBISHI ELECTRIC CORP et al) 22 March 1996 abstract	1-8, 10-11, 13, 14, 17 9-12, 15-16
X Y	US 5041842 A (BLAESE) 20 August 1991 column 1 lines 35-45, column 3 lines 10-16, Fig 1	1-8, 10-11, 13-14 9-12, 15-17

☒ Further documents are listed in the continuation of Box C☒ See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
30 June 2003

Date of mailing of the international search report

04 JUL 2003

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
E-mail address: pct@ipaaustralia.gov.au
Facsimile No. (02) 6285 3929

Authorized officer

Mani Ramachandran

Telephone No : (02) 6283 2233

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU03/00690

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	EP 0528775 A1 (ERICSSON GE MOBILE COMMUNICATIONS INC) 24 February 1993 page 2, lines 39-50, page 3 lines 1-7, Fig 1	1-8,10-11,13-14 9-12, 15-17
X Y	Patent Abstracts of Japan, JP 2001-094333 (SATO T) 6 April 2001 abstract	1-8,10-11,13-14 9-12, 15-17
X Y	Patent Abstracts of Japan, JP 05-251919 (TOKIMEC INC) 28 September 1993 abstract	1-8,10-11,13-14 9-12, 15-17
X Y	GB 1507836 (MARCONI COMPANY LTD) 19 April 1978 whole document	1-8,10-11,13-14 9-12, 15-17
Y	US 6133891 A (JOSYPENKO) 17 October 2000 Figs 1, 2, column 6 lines 17-32	12
<u>Note:</u> For the Y indications, US 5345248 and US 6133891 can be combined with any one of the other citations with relevance to the same claims.		

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU03/00690

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report			Patent Family Member				
US	5345248	NONE					
JP	8078946	NONE					
US	5041842	NONE					
EP	528775	AU	21011/92	CA	2074015	FI	923614
		HK	1006608	JP	5206715	MX	9204664
		SE	9102379	SG	52224	US	5592184
JP	2001094333	JP	3382900				
JP	5251919	JP	3195009				
GB	1507836	NONE					
US	6133891	NONE					
END OF ANNEX							